

Description:

100% Dytec3® seamless light weight liner with PU coating on the palm area.

Innovative fibre coupled with a new knitting technology to bring you a high abrasion resistance and medium cut resistance while keeping a high dexterity and sensitivity on the fingers area.

Elasticised composite knitted wrist with colour coded and over-locked cuff.

Designed for a multiple range of industries and mechanical risks exposure, it is the ideal safety glove for general maintenance and assembling work.

Sizes Available:

SIZE AS PER EN 420	CUFF COLOUR
8	Yellow
9	Brown
10	Black

Cleaning & Maintenance:

Gloves should not be left in contaminated condition if reuse is intended especially if potential hazards exist. Before removal from the hands excess contaminant should first be removed however, should this not be possible, it is advisable to ease left and right hand gloves off using the gloved hand & remove the gloves without the contaminant contacting the bare hands. The gloves may then be de-contaminated as indicated below:



100% Dytec3® gloves have proven that dry cleaning as well as laundering are suitable cleaning methods.

We recommend that no bleaching or oxidising ingredients or any fabric softeners be used.

Recommended washing temperature is between 40°C and 60°C (104-140°F) with mild detergents.

The drying process may cause felting on the fabric surface. Drying temperature should not exceed 70°C (158°F).

There is no remarkable impact on cut resistance during the normal life cycle of a glove however, depending on glove construction, staining and cleaning method, the differences in shrinkage, weight loss, yarn strength and colour may occur. In order to maximise the glove life cycle we recommend the mildest possible cleaning conditions in terms of temperature, chemicals and cycle duration.



Due to a wide variety of possible constructions and combinations with other materials we recommend to always consult your professional cleaning service to determine the best suitable cleaning method.

Storage:

Store the gloves the original packaging in a cool dry place and out of direct sunlight and UV light.

Packaging:

The gloves are packed in individual bags. The gloves are placed in cardboard cartons suitable for transportation and storage.

Obsolescence:

Stored correctly, the gloves physical properties will not change for up to three years.

Note:


None of the materials or processes used in the manufacture of these products is known to be harmful to the wearer. The manufacturer has examined under the system for ensuring quality of production by means of monitoring and inspection. The gloves are designed to accommodate the basic safety requirements and standards for Personal Protective Equipment. The information contained herein is intended to assist the wearer in the selection of personal protective equipment. Actual conditions of use cannot be directly simulated in a test environment so it is therefore the responsibility of the end user and not the manufacturer or supplier to determine the gloves suitability for the intended use.

All gloves should be thoroughly inspected before use to ensure no damage is present.

DROMEX

DT3# CUT RESISTANT GLOVE

DYTEC3®

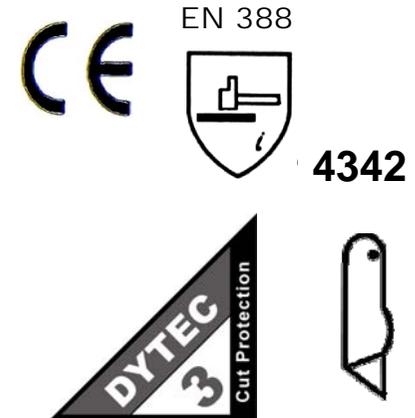

CUT LEVEL 3

Tested in accordance with the European directive for PPE (89/686/EEC) for simple design, and is compliant with EN 420 & EN 388.

www.dromex.net



CE EN 388:1994
MECHANICAL RISKS



A ABRASION RESISTANCE
Number of cycles (6.1)

1	2	3	4	5
100	500	2000	8000	~

B BLADE CUT RESISTANCE
Index (6.2)

1	2	3	4	5
1,2	2,5	5,0	10,0	20,0

C TEAR RESISTANCE
Newton's (6.3)

1	2	3	4	5
10	25	50	75	~

D PUNCTURE RESISTANCE
Newton's (6.4)

1	2	3	4	5
20	60	100	150	~



CUT LEVEL 3
HIGH ABRASION
LINT FREE
UV RESISTANT
WASHABLE

Dytec3® safety gloves have been developed in Europe specifically for hand protection to address a multitude of applications and reduce lost time from mechanical and cut related injuries. This abrasion resistant cut resistant material is both comfortable and flexible. The design takes its inspiration from the sailing industries where high abrasion and high dexterity is needed.

Dytec3® safety gloves have a very favourable price to performance ratio and reduce significantly lost time injuries that could occur during the working process.

AUTOMOTIVE / AEROSPACE
GLASS / STEEL
GENERAL MAINTENANCE
ASSEMBLING WORK