

TECHNICAL DATA SHEET & CERTIFICATE OF CONFORMITY

File: dromex tds LPRO Class 1
Revision: 01 (04 February 2016)
Page: 1 of 2



Dromex

DROMEX LINEPRO 61MC INSULATING GLOVES

CLASS: 1

CATEGORY: AC

Description:

Insulating gloves that are inspected and tested for electrical insulation as per the relevant class and category. These gloves are made with a special grade of natural rubber compounds for assured electrical protection, superior anatomical construction that will result in lower hand fatigue with higher flexibility for long duration wearer comfort and electrical installation for installation, maintenance & repairs that involve voltage equipment as per the relevant class.

Specifications:

Registered Trademark: DPL LINEPRO

Class: 1 (EN60903:2014)

Max Use Voltage AC: 7500V (Proof Test Voltage AC: 10000V)

Category: AC

Material Thickness: 1.52mm

Lining Type: Unlined chlorinated

Cuff Type: Straight

Palm Type: Smooth

Colour: Red

Made with special grade natural rubber compounds for assured electrical protection.



Please Note !!!!

When the opaque plastic bag is opened the date of issue should be noted and the glove is no longer returnable

Compliance & Conformity:

61MC Unlined natural rubber five finger gauntlet is manufactured to comply with EN 60903:2014 class 1 Live Working Electrical Insulating Gloves, category AC (Acid & Extremely Low Temperature) and sizes as per EN 60903:2014 table F.1 as per technical reports SATRA: SPC0176966/0930/3, SPC0 178609/0939, SPC0 178292/0937, CHM0184674/ERC and has been subject to an EC Type-examination in accordance with Article 10 of the PPE Directive (89/686/EEC).

The gloves will have a batch identifying batch number: YYYYMMDDNNNN (Year, Month Day & Number)

Produced at an ISO 9001:2008/ISO 14000:2004 accredited facility



Packing, Storage & Obsolescence:

Packed in opaque UV resistant bags and individual boxes for product protection. Insulating gloves should be stored unfolded, right side out, not distorted and not stored directly above or in the proximity of steam pipes, radiators and other sources of artificial heat. Gloves should be stored in a container when it is not used that is ventilated with a moisture-proof environment and a temperature range between 10°C - 21°C. Avoid direct exposure to sunlight, sources of ozone, sharp objects and chemical substances to avoid corrosion. Care should be taken to avoid mechanical damage caused by abrasion and sharp edges. Insulating gloves should be boxed when transporting.

Under normal use, end of life is 2 years**.

Cleaning & Maintenance:

When insulating gloves become soiled, they should be cleaned and disinfected with a mild detergent. Do not use an unknown strong or corrosive substance which may be harmful to the gloves. Gloves that become wet during use, or by washing, must be dried thoroughly by hanging in the air, but not in a manner that will cause the temperature of the gloves to exceed to 65°C.

NOTE! Periodic Inspection and Electrical Re-testing as per ISO 60903:2014

It is essential that tests are done by a competent test facility. Only formally trained and qualified persons should perform periodic inspection and electrical re-testing. No gloves should be issued for service unless it has been retested in the previous twelve months. No gloves to be issued unless they have been tested within a maximum period of six months after issued for service. The date of manufacture is the original test date. Gloves should first be cleaned before any inspection takes place. Considerations should be given in the cleaning process to the



Dromex

management of blood borne pathogens. The tests consist of air inflation to check for air leaks, a visual inspection while pressurized and then a dielectric test in accordance with the specified routine test of 5.6.2.


Special Instructions:

This product contains natural rubber latex, which may cause allergic reactions in some individuals. Discontinue usage and consult your physician should sign of allergic reaction appear.

Materials:

Special grade natural rubber compounds

Marking:

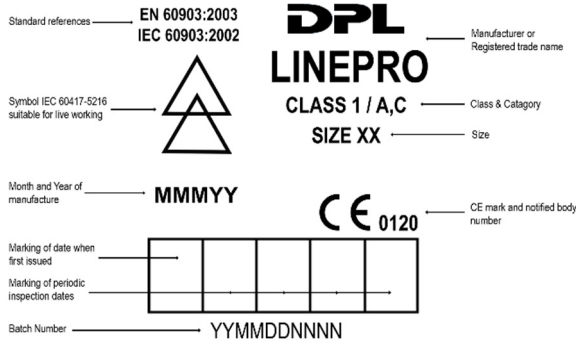

Physical Dimensions:

All dimensions in mm
Internal circumference \pm 10 mm
Tolerance \pm 15 mm

Size	Palm	Wrist	Cuff	Length
8	206	206	379	360
9	227	227	392	360
10	251	251	396	360

Disposal:

All industrial waste should be disposed of correctly according to local regulations and good disposal practice. Insulating gloves should be disposed of considering the hazardous substance they were used for and the material they are made up of. Please consider recycling.

